

LIGHT DUTY FIRE FIGHTING VEHICLE

NFM 40/4-SC

CHASSIS

MAN TGL 12.180, 4x2, Single Cabin, Manual Transmission, 180 HP, 11,900 KG GVW

BODY STRUCTURE

Made using aluminum profiles 6061 T6, fastened to a strong base structure made of stainless steel tubing.

STORAGE LOCKERS

Four (4) storage lockers, two on the R/H side and two on the L/H side of the vehicle closed by light alloy roller shutters.

WATER & FOAM TANKS

4,000/400 Liters made of Polypropylene with life time warranty

FIRE PUMP

PTO Driven, Single stage, centrifugal type normal pressure pump, 2,000 LPM at 10 Bar and 3 meter suction lift.

FOAM SYSTEM

Around-the-Pump Foam Proportioning System 0 – 6 %, Manual adjustable

MONITOR





Water / Foam Monitor with jet/fog pattern, with adjustable output from 800 lpm to 1,600 lpm and throw range up to 50 meters

HOSE REEL

Manual Rewind hose reel fitted with rubber hose of 1.25" x 30m fitted with pistol type nozzle for jet and fog patterns,

ACCESSORIES

Wide range of fire fighting accessories and equipments including hoses, nozzles, SCBA Sets, Generator and personal fire protections sets.

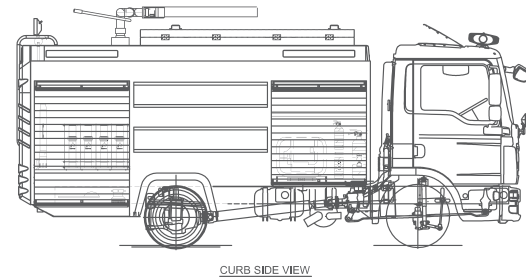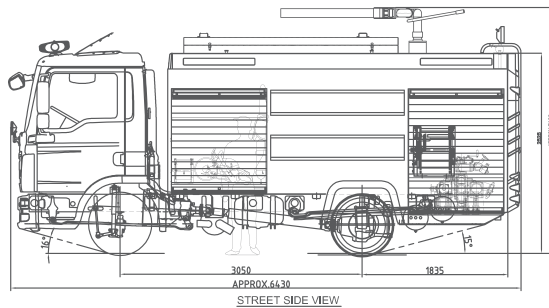

Note: NAFFCO reserves the right to introduce minor changes to improve the operational performance of the vehicle. Similarly, NAFFCO reserves the right to supply equivalent equipment/components if they should become unavailable or obsolete.

LIGHT DUTY FIRE FIGHTING VEHICLE

NFM 40/4-SC



Passion to Protect



naffco.com