

MEDIUM DUTY FIRE FIGHTING VEHICLE

NFM 60/50 - DC

CHASSIS

MAN TGM 18.240, 4x2, Double Cabin, Manual Transmission, 240 HP, 18,000 KG GVW, other chassis available upon request.

BODY STRUCTURE

Made using aluminum profiles 6061 T6, fastened to a strong base structure made of stainless steel tubing.

STORAGE LOCKERS

Two (2) storage lockers, one on the R/H side and one on the L/H side of the vehicle closed by light alloy roller shutters.

WATER & FOAM TANKS

6,000/500 Liters made of Polypropylene with life time warranty.

FIRE PUMP

PTO Driven, Single stage, centrifugal type normal pressure pump, 3,000 LPM at 8 Bar and 3 meter suction lift.

FOAM SYSTEM

Around-the-Pump Foam Proportioning System 0 – 6 %, Manual adjustable.

MONITOR





Water / Foam Monitor with jet/fog pattern, with adjustable output from 800 lpm to 2,400 lpm and throw range up to 65meters.

HOSE REEL

Manual Rewind hose reel fitted with rubber hose of 1.25" x 30m fitted with pistol type nozzle for jet and fog patterns.

ACCESSORIES

Wide range of fire fighting accessories and equipments including hoses, nozzles, SCBA Sets, Generator and personal fire protections sets.

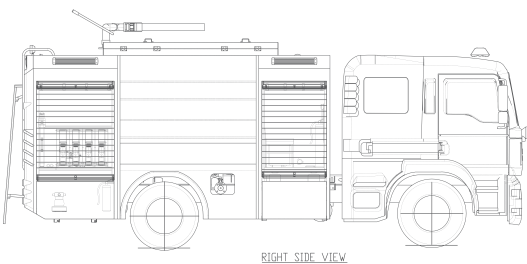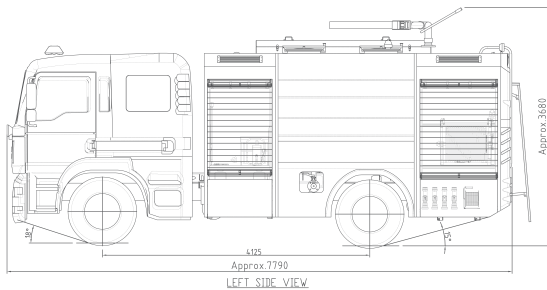

Note: NAFFCO reserves the right to introduce minor changes to improve the operational performance of the vehicle. Similarly, NAFFCO reserves the right to supply equivalent equipment/components if they should become unavailable or obsolete.

MEDIUM DUTY FIRE FIGHTING VEHICLE

NFM 60/50 - DC



Passion to Protect



naffco.com